

HOW TO ORDER

TXF200-S-U-F-74-F3-RV3-M-SM

FILTER MODEL

USAGE

SUCTION = S
RETURN = R

FLOW DIRECTION

UP = U
DOWN = D

PORT STYLE

FEMALE NPT COUPLING = F

ELEMENT MICRON RATING

595
238
149
74
40
25
40A

STAINLESS STEEL
WIRE CLOTH

SYNTHETIC MEDIA

DIRT INDICATOR

NO SYMBOL = NO INDICATOR
S = FOR SUCTION LINE
SM = FOR SUCTION LINE WITH MEMORY
R = FOR RETURN LINE

MAGNETS


NO SYMBOL = NO MAGNETS
M = WITH MAGNETS

BYPASS VALVE

RV3 = 3 PSI
RV5 = 5 PSI
RV15 = 15 PSI

SEALS

NO SYMBOL = BUNA N
F3 = VITON

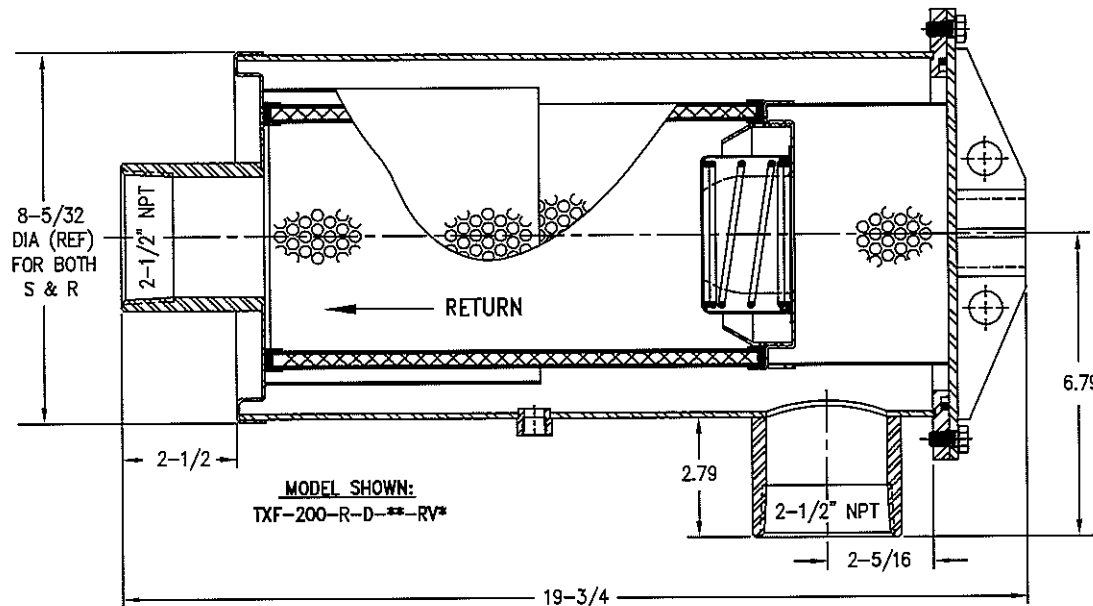


REPLACEMENT ELEMENTS

| MICRON | PART # |
|--------|----------|
| 595 | 6350-30M |
| 238 | 6350 |
| 149 | 6350-01 |
| 74 | 6350-02 |
| 40 | 6350-03 |
| 25 | 6350-04 |
| 40A | 6350-05 |

TECHNICAL NOTES:

RATED TO 200 GPM
PRESSURE RATING = 100 PSI
CARBON STEEL HOUSING
WELDED AND PAINTED BLACK
ELEMENT SCREEN AREA = 800 SQ. INCHES

| DO NOT SCALE DRAWING | | DISC FILE NO. EB ZIP-1 | MATERIAL | TITLE |
|---|-----------|---|---|------------------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | | ASSY REF. | | TXF-200 FILTER OUTLINE |
| TOLERANCES | | DR. D BALL DATE 07-24-06 |  FLOW EZY FILTERS, INC. ANN ARBOR, MICHIGAN 48106 | ITEM NO. |
| 3 PLACE ± | 2 PLACE ± | CHL DATE | | DRAWING NO. 10068-CR |
| MACHINED SURFACES | | DEBURR ALL EDGES .002 TO .007 FILED .01 TO .02 RADIUS | SCALE NONE | SHEET OF REV. |