



HOUSING QUICK REFERENCE GUIDE

AUTOMOTIVE									
SERIES	Page	Pressure Rating	Flow Rate GPM	Filtration Area SQ. IN.	Weight w/Element OZ.	Hex Nut Size	Avail. Micron Size	Overall Length OAL	Outer Dia. OD
1000 NPT	5	250 PSI	Up to 2 GPM	1 SQ. IN.	3 OZ.	0.75"	10, 25, 40, 74, 149	1.75"	1"
1000 AN-6								2.88"	
2000								4.31"	
3000 AN-6	6	250 PSI	Up to 4 GPM	20 SQ. IN.	5.2 OZ.	0.75"	10, 25, 40, 74, 149	5.94"	1.5"
3000 AN-8						0.875"			
4000						1.25"		4.66"	
9000 AN-10	8	250 PSI	Up to 9 GPM	40 SQ. IN.	12.5 OZ.	1.25"	10, 25, 40, 74, 149	6.38"	2.0"
9000 AN-12								6.56"	
9000 C10								6.44"	
9000 C12								6.13"	
9000 C16								6.5"	
9000 CP10								7.06"	
9000 CP12	9	250 PSI	Up to 9 GPM	40 SQ. IN.	12.5 OZ.	1.25"	10, 25, 40, 74, 149	6.94"	
9000 CP16								7.125"	
14000	7	250 PSI	Up to 16 GPM	60 SQ. IN.	1 LB. 2 OZ.	2.125"	10, 25, 40, 74, 149	7.78"	2.13"
16000 AN-10	10	250 PSI	Up to 16 GPM	60 SQ. IN.	15 OZ.	1.25"	10, 25, 40, 74, 149	8.75"	2.0"
16000 AN-12								8.87"	
16000 C10								1.375"	
16000 C12								1.25"	
16000 C16								1.375"	
16000 CP10	11	250 PSI	Up to 16 GPM	60 SQ. IN.	1 LB. 1 OZ.	1.25"	10, 25, 40, 74, 149	9.38"	
16000 CP12								1.375"	
16000 CP16								1.375"	
Y2SS	12	300 PSI	Up to 2 GPM	2.5 SQ. IN.	7.5 OZ.	—	25, 40, 75, 149	2.25"	2.25"
Mounting Clamps	13	Stainless Steel Bracket with Thermoplastic Elastomer Bushing - Fits All Models							
Filter Elements		Stainless Steel for Existing Housing or Self-Made Adapter							

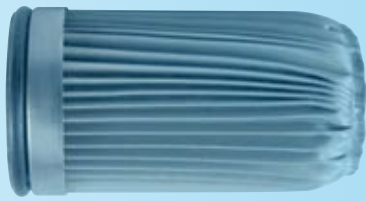

FILTER ELEMENT QUICK REFERENCE GUIDE

FILTER ELEMENTS ONLY - Stainless Steel										
FILTER ELEMENT SERIES	Page	Pressure Rating PSI	Filtration Area SQ. IN.	Element Weight OZ.	Avail. Micron Size	Standard Seals	Overall Length OAL	Outer Dia. OD	Inner Dia. ID	For Model Series
Perforated Inside and Outside										
8108	13	250 PSI	140 SQ. IN.	4.6 OZ.	149	N/A	7.88"	1.67"	.69"	N/A
8109					63					
8109-01					74					
Perforated Inside Only										
8109-02	13	250 PSI	140 SQ. IN.	4.3 OZ.	63	N/A	7.88"	1.67"	.69"	N/A
8109-03					74					
8109-04					100					
8109-05					120					
6180	5	250 PSI	1 SQ. IN.	1 OZ.	10, 25, 40, 74, 149	Buna	N/A	.75"	N/A	1000
Single Open End SOE										
9133	5	250 PSI	12 SQ. IN.	2 OZ.	25, 40, 74, 149	Buna	1.94"	.83"	.39"	2000
8286	6		20 SQ. IN.		3 OZ.		10, 25, 40, 74, 149	3.26"	1.03"	.58"
8736	9		40 SQ. IN.	2.83"				1.60"	1.08"	9000
8731	7 / 11		60 SQ. IN.	4 OZ.	10, 25, 40, 74, 100, 149		5.68"	1.60"	1.08"	14000 16000
Double Open End DOE										
6177	12	300 PSI	2.5 SQ. IN.	2 OZ.	25, 40, 74, 149	N/A	1.19"	.75"	.60"	Y2SS